

In compliance with Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation - CPR) this certificate applies to the construction product

**eggo®**

according to the product specification listed in the current addendum to this certificate placed on the market by

**Company**  
**EGG HOLZ KÄLIN AG**  
**Eggerstraße 1**  
**CH-8847 Egg**

and produced in the manufacturing plant

**CH-8847 Egg, Eggerstraße 1**

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in

**ETA-17/0992, issued on 02.07.2025**

and

**EAD 140022-00-0304**

under system 1 for the performance set out in the ETA are applied and that the factory production control conducted by the manufacturer is assessed to ensure the constancy of performance of the construction product.

## **CERTIFICATE OF CONSTANCY OF PERFORMANCE**

**Certificate number:** 1359-CPR-0756

**Date of first issue:** 24.07.2025


**Date of issuance:** 24.07.2025

This certificate will remain valid as long as neither the ETA, the EAD, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body.

For the validity of this certificate see [www.holzforchung.at](http://www.holzforchung.at).



**DI Bernhard Kraus**  
Authorised signatory

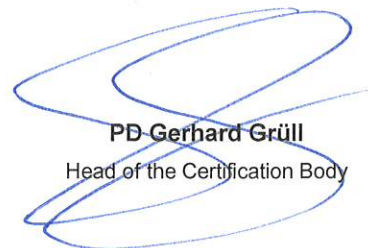

**PD Gerhard Grüll**  
Head of the Certification Body

## **Addendum to certificate 1359-CPR-0756**

Date of issuance: 24.07.2025

### **Scope of certification:**

### **Prefabricated wood-based loadbearing stressed skin panels**

#### **egger® - box element (EK)**

Height h:	≤ 320 mm
Width w:	≤ 200 mm
Thickness of the side ribs:	27 mm – 33 mm
Thickness skin bottom below:	25 mm – 97 mm
Thickness skin bottom top:	25 mm – 40 mm
Length:	≤ 18 m
Spacing of stiffeners:	≤ 1,25 m
Wood species:	Spruce/Fir
Adhesive – Finger joints:	Type I: PUR according to EN 15425
Adhesive – Surface bonding:	Type I: MUF according to EN 301

#### **egger® - floor element (EB)**

Height h:	≤ 320 mm
Width w:	≤ 514 / 1000 mm
Width of lamellae:	210 mm
Thickness of outer ribs:	30,5 mm
Thickness of inner ribs:	33,5 mm
Thickness skin bottom below:	25 mm – 97 mm
Thickness skin bottom top:	25 mm – 97 mm
Number of boxes:	≤ 2 / 4
Length:	≤ 18 m
Spacing of stiffeners:	≤ 1,25 m
Wood species:	Spruce/Fir
Adhesive – Finger joints:	Type I: PUR according to EN 15425
Adhesive – Surface bonding:	Type I: MUF according to EN 301

**eggo® - heavy load element (ES)**

Height h:	$300 < h \leq 500 \text{ mm}$
Width w:	$\leq 1000 \text{ mm}$
Width of lamellae:	200 mm
Thickness of outer ribs:	37,5 mm
Thickness of inner ribs:	41,5 mm
Thickness skin bottom below:	31 mm – 97 mm
Thickness skin bottom center:	31 mm
Thickness skin bottom top:	31 mm – 97 mm
Number of boxes:	$\leq 4$
Length:	$\leq 18 \text{ m}$
Spacing of stiffeners:	$\leq 1,25 \text{ m}$
Wood species:	Spruce/Fir
Adhesive – Finger joints:	Type I: PUR according to EN 15425
Adhesive – Surface bonding:	Type I: MUF according to EN 301

**eggo® - roof element (ED)**

Height h:	$\leq 240 \text{ mm}$
Width w:	$\leq 514 / 1000 \text{ mm}$
Width of lamellae:	210 mm
Thickness of outer ribs:	30,5 mm
Thickness of inner ribs:	33,5 mm
Thickness skin bottom below:	31 mm – 97 mm
Number of boxes:	$\leq 2 / 4$
Length:	$\leq 18 \text{ m}$
Spacing of stiffeners:	$\leq 1,0 \text{ m}$
Wood species:	Spruce/Fir
Adhesive – Finger joints:	Type I: PUR according to EN 15425
Adhesive – Surface bonding:	Type I: MUF according to EN 301